



Main panel – Load button

Possibilities:

- Load a single program .syx file in the panel
- Load a program from the D1, D2 banks (if loaded)
- Load a program from the U1-U4 banks (if loaded)
- Load a program from the F5-F8 banks
- The loaded program is also available in the Pro 2 buffer (if modified, it must be saved – see Main panel Save)

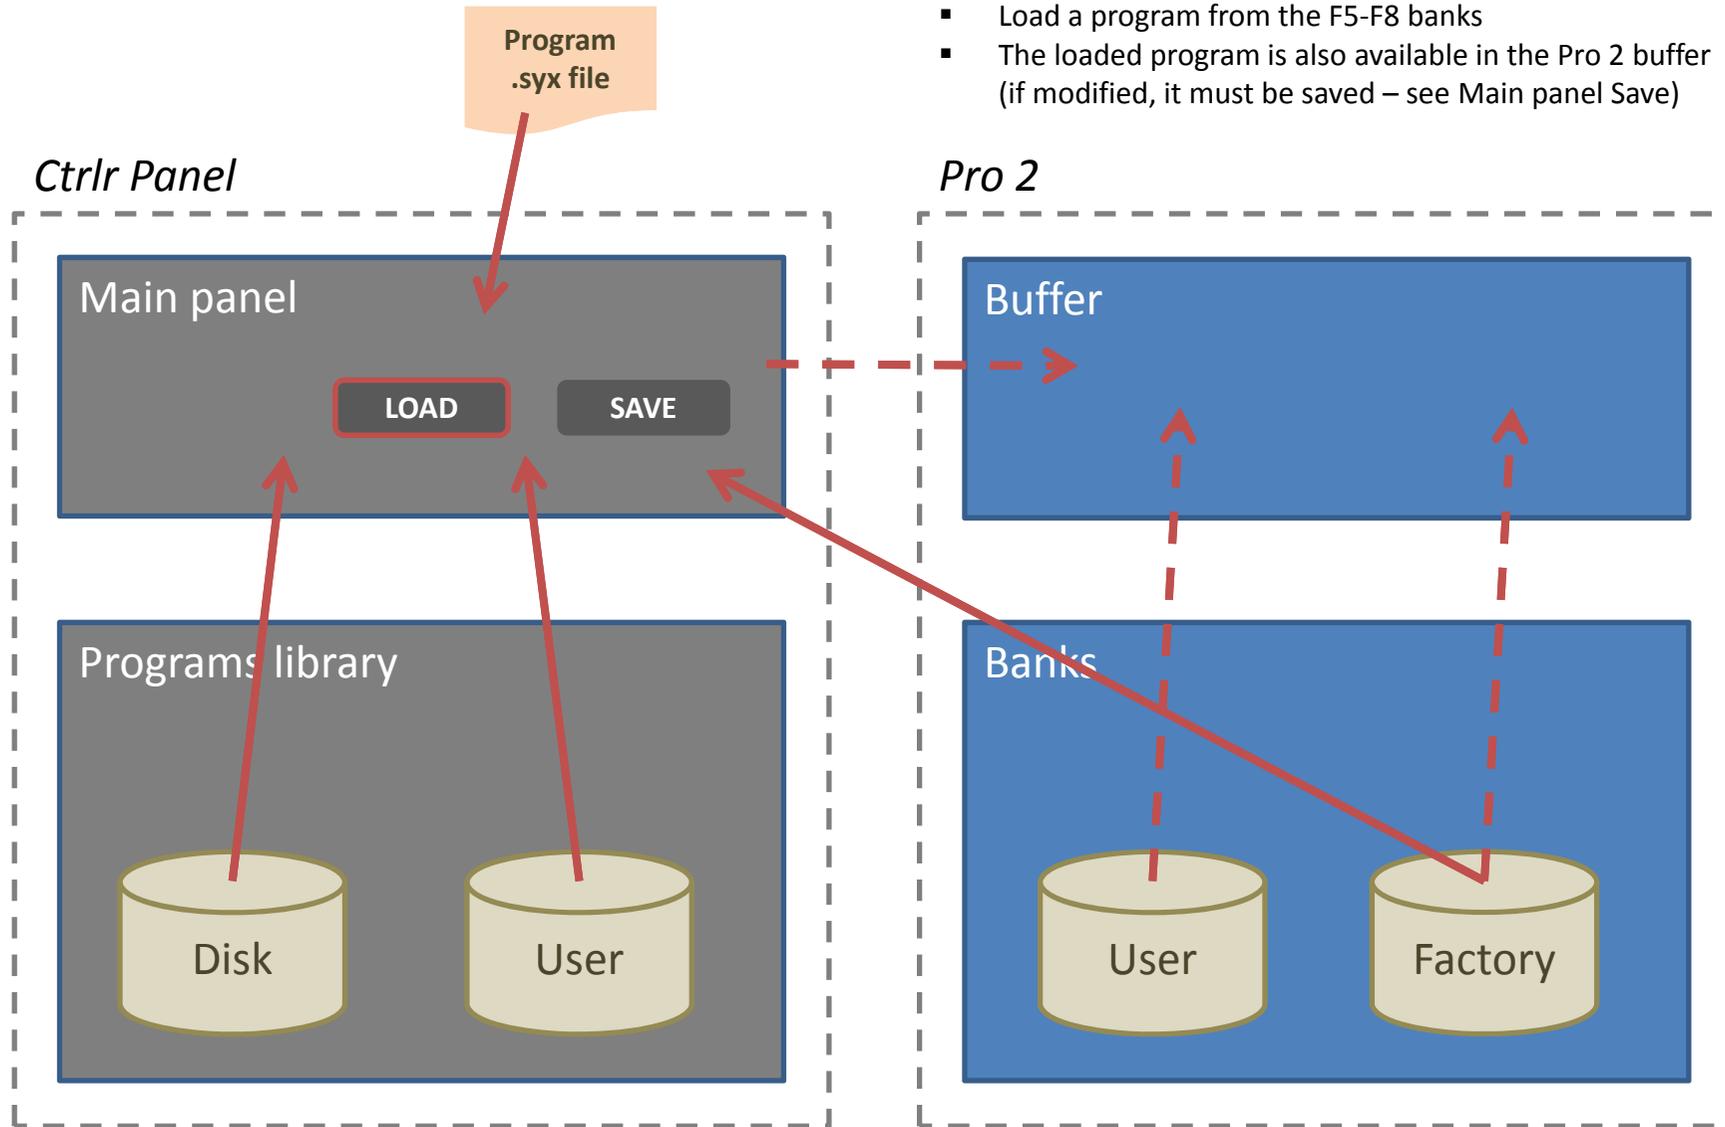


Main panel – Save button

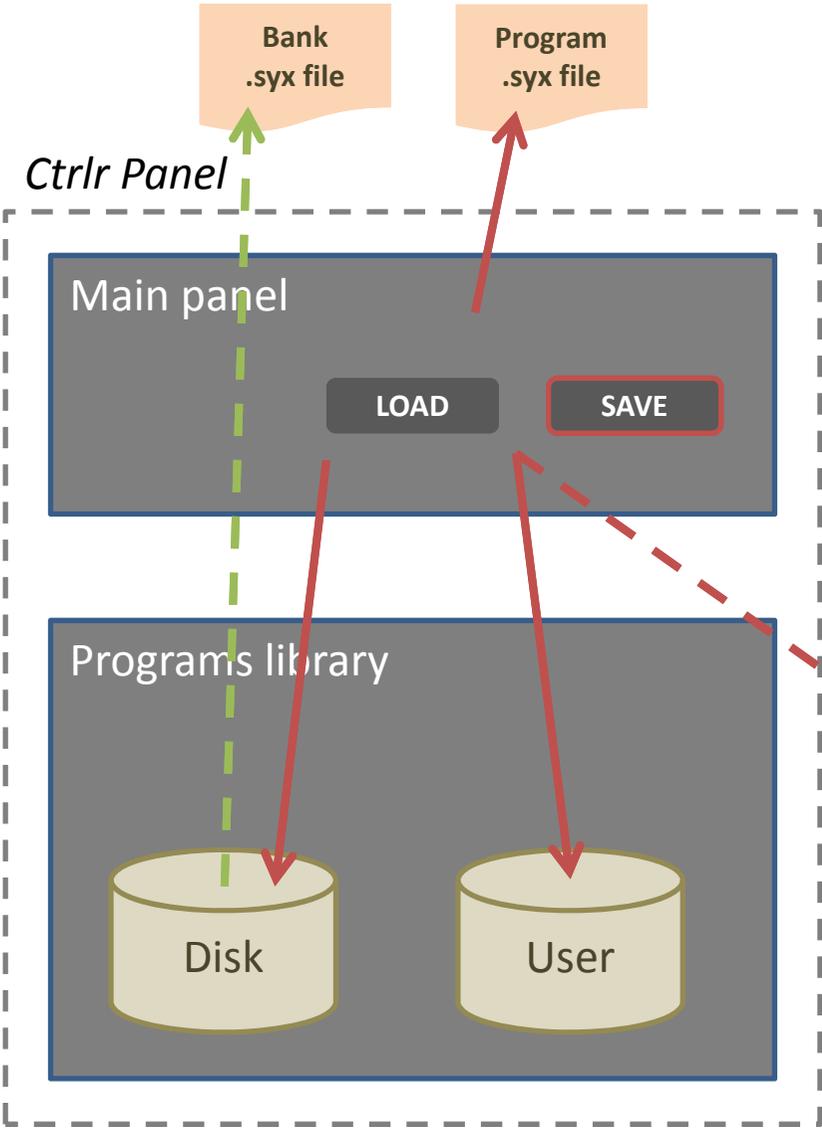

Possibilities:

- Save the current program to .syx file
- Save the current program to the D1, D2 banks (if loaded)
- Save the current program to the U1-U4 banks (if loaded)
- When saved in a Disk bank, the Disk bank is also updated on the computer
- When saved in a User bank, the program is also saved in the corresponding Pro 2 User bank

Pro 2

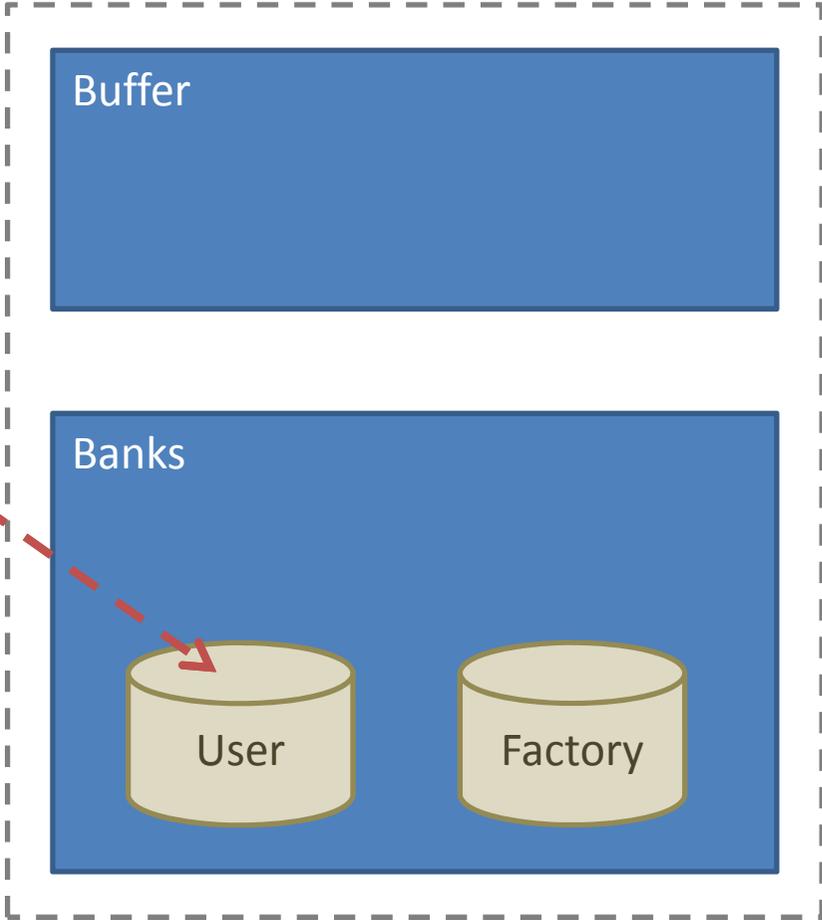


Program actions – Load


Possibilities (1/2) :

- Load **Source program** from Bank (better visibility of all programs and easier selection of any Dx, Ux program than when using main panel Load)
- The **Source program** is selected with left-click
- The loaded program is also available in the Pro 2 buffer (if modified, it must be saved – see Main panel Save)

Ctrlr Panel

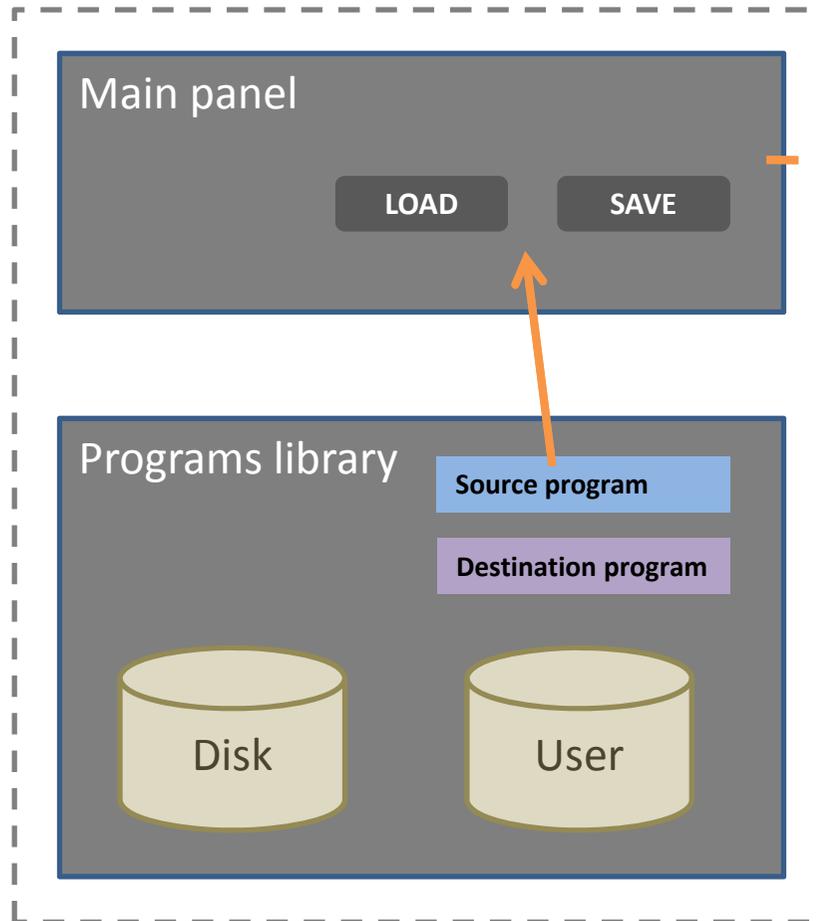


Pro 2

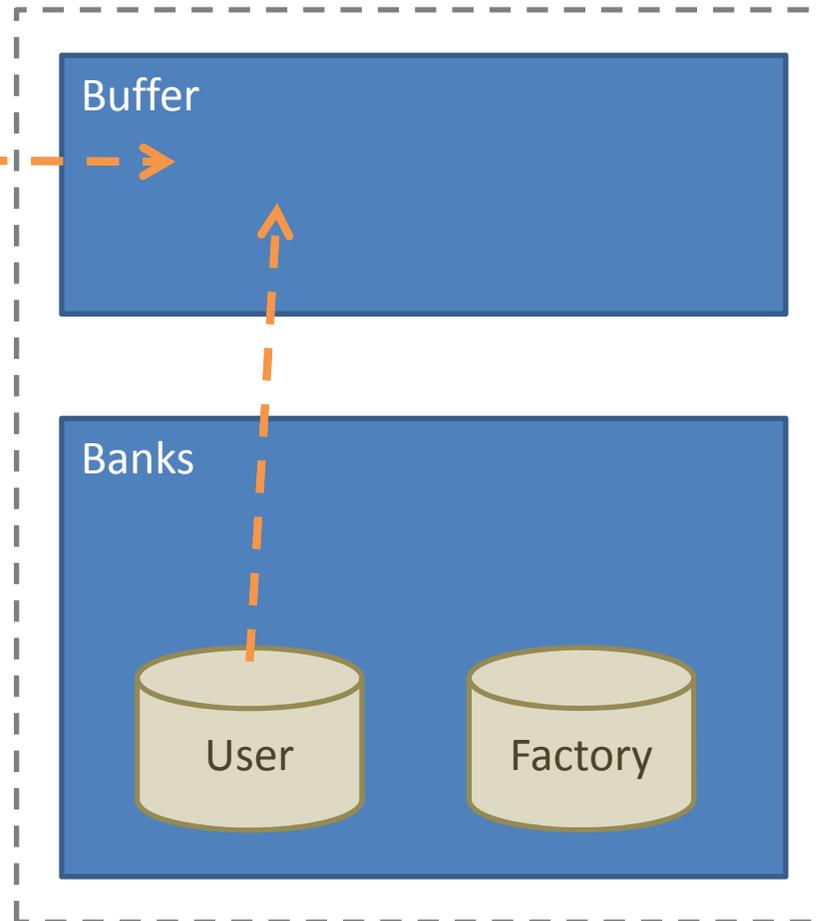

Program actions – Load

Possibilities (2/2) :


- Load a single program .syx file in Dx, Ux
- Load a basic program in Dx, Ux
- Optional: load in panel and in Pro 2
- The **Destination program** is selected with right-click

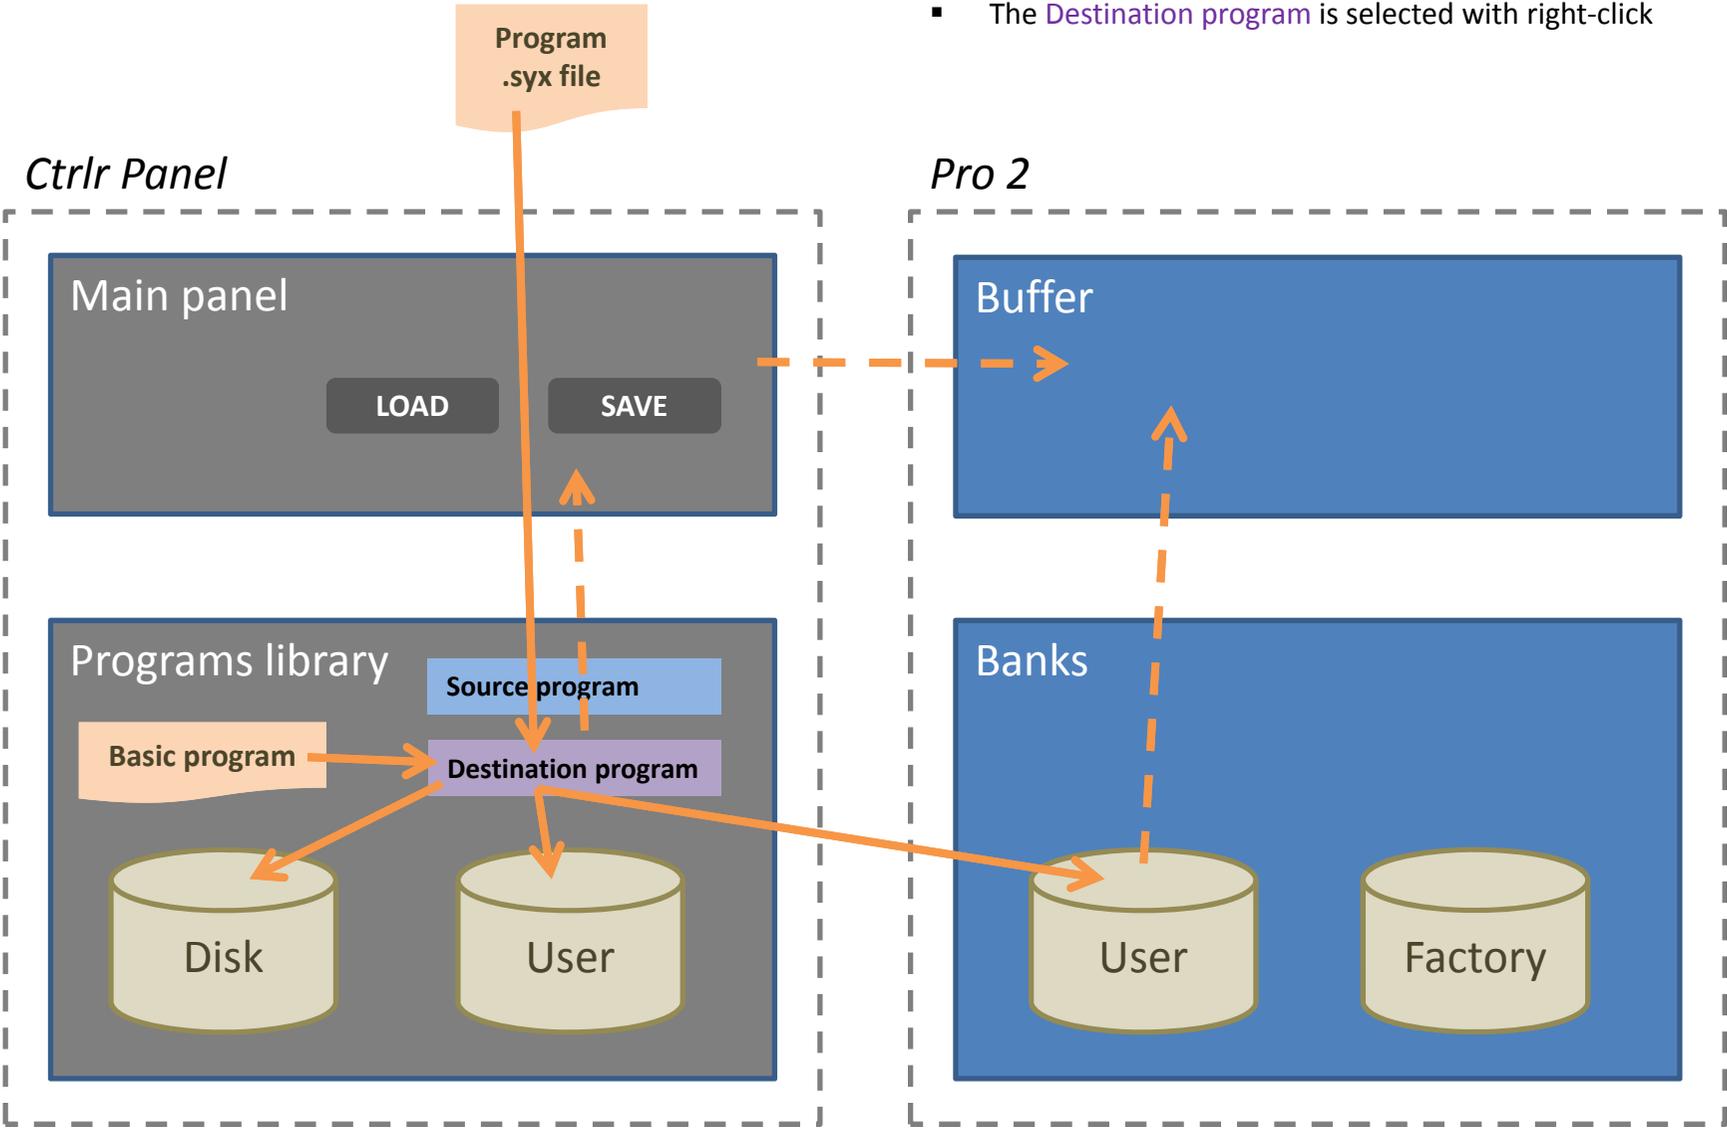

Program actions – Save

Possibilities (2/2) :

- Save the **Source program** to a .syx file
- The **Source program** is selected with left-click

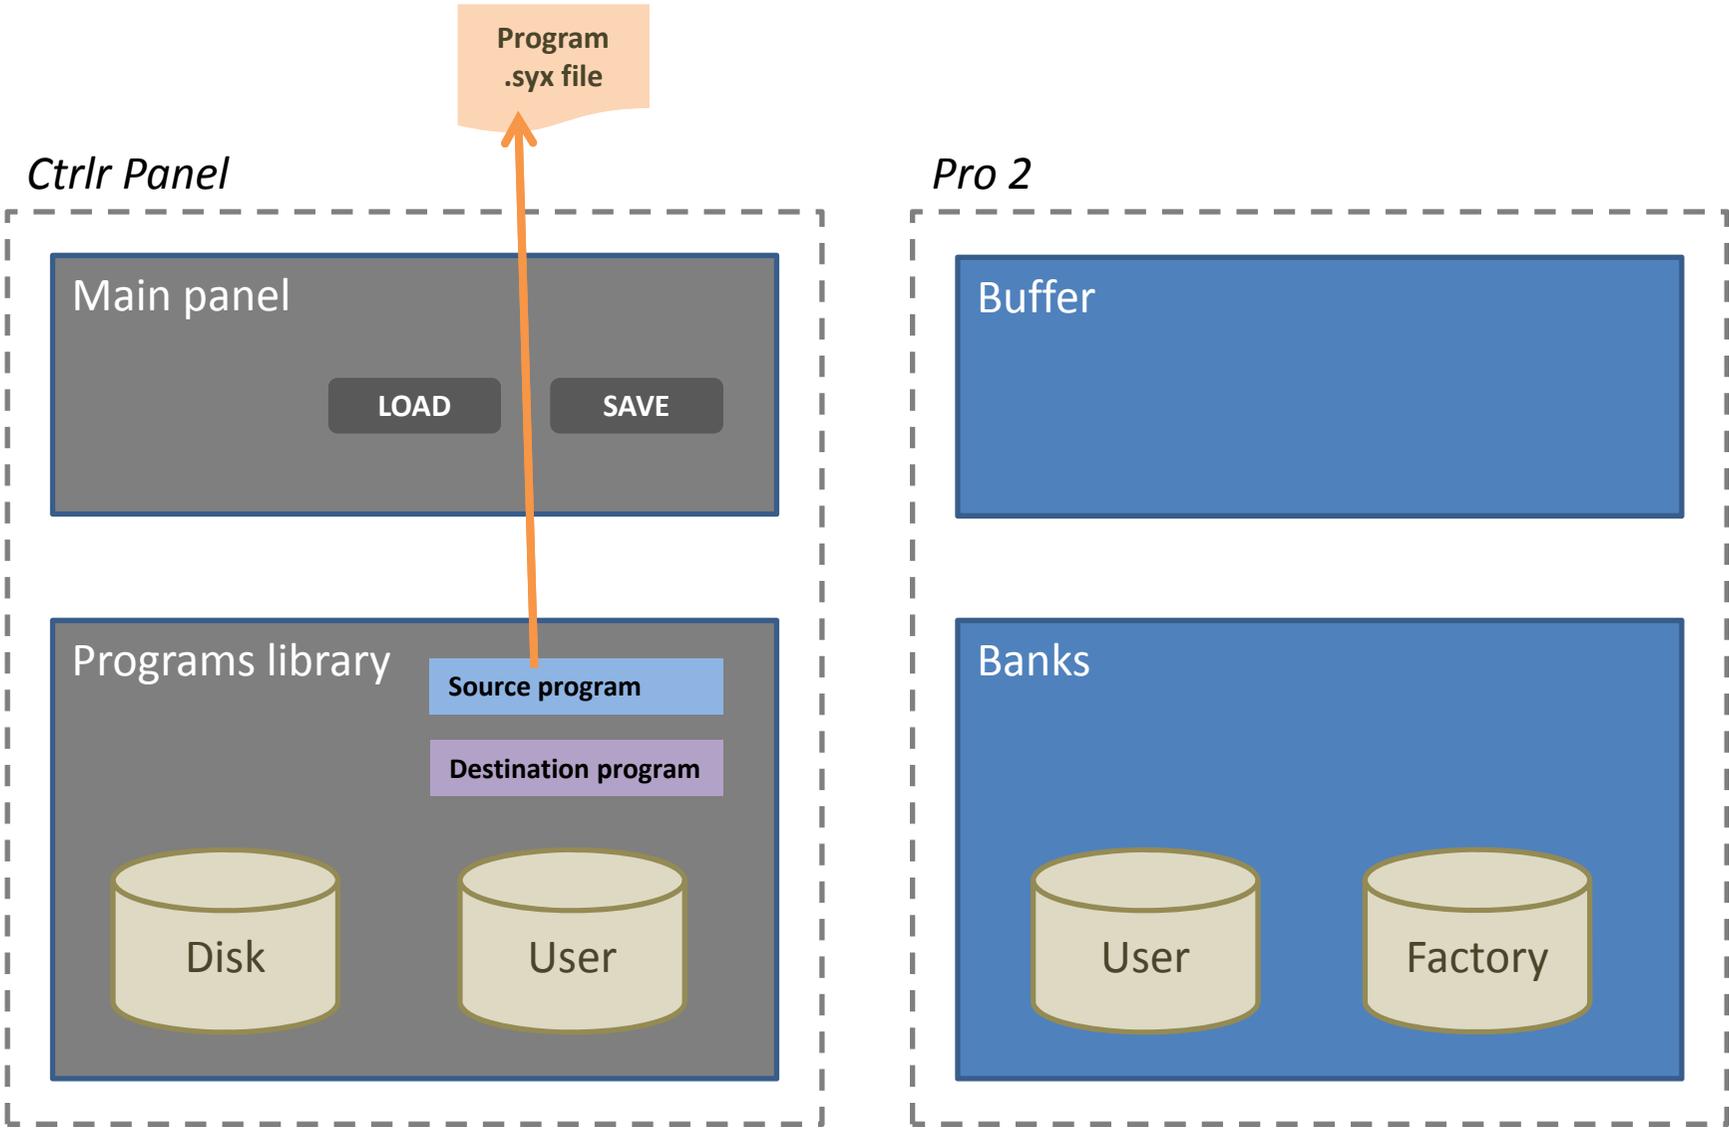


Program actions – Move

Possibilities:

- Move a program from **Source** to **Destination**
- The **Source program** is replaced by a Basic program
- If the **Source program** is in Ux, it is changed on the Pro 2
- If the **Destination program** is in Ux, it is changed on the Pro 2
- The **Source program** is selected with left-click
- The **Destination program** is selected with right-click

Pro 2

Ctrlr Panel

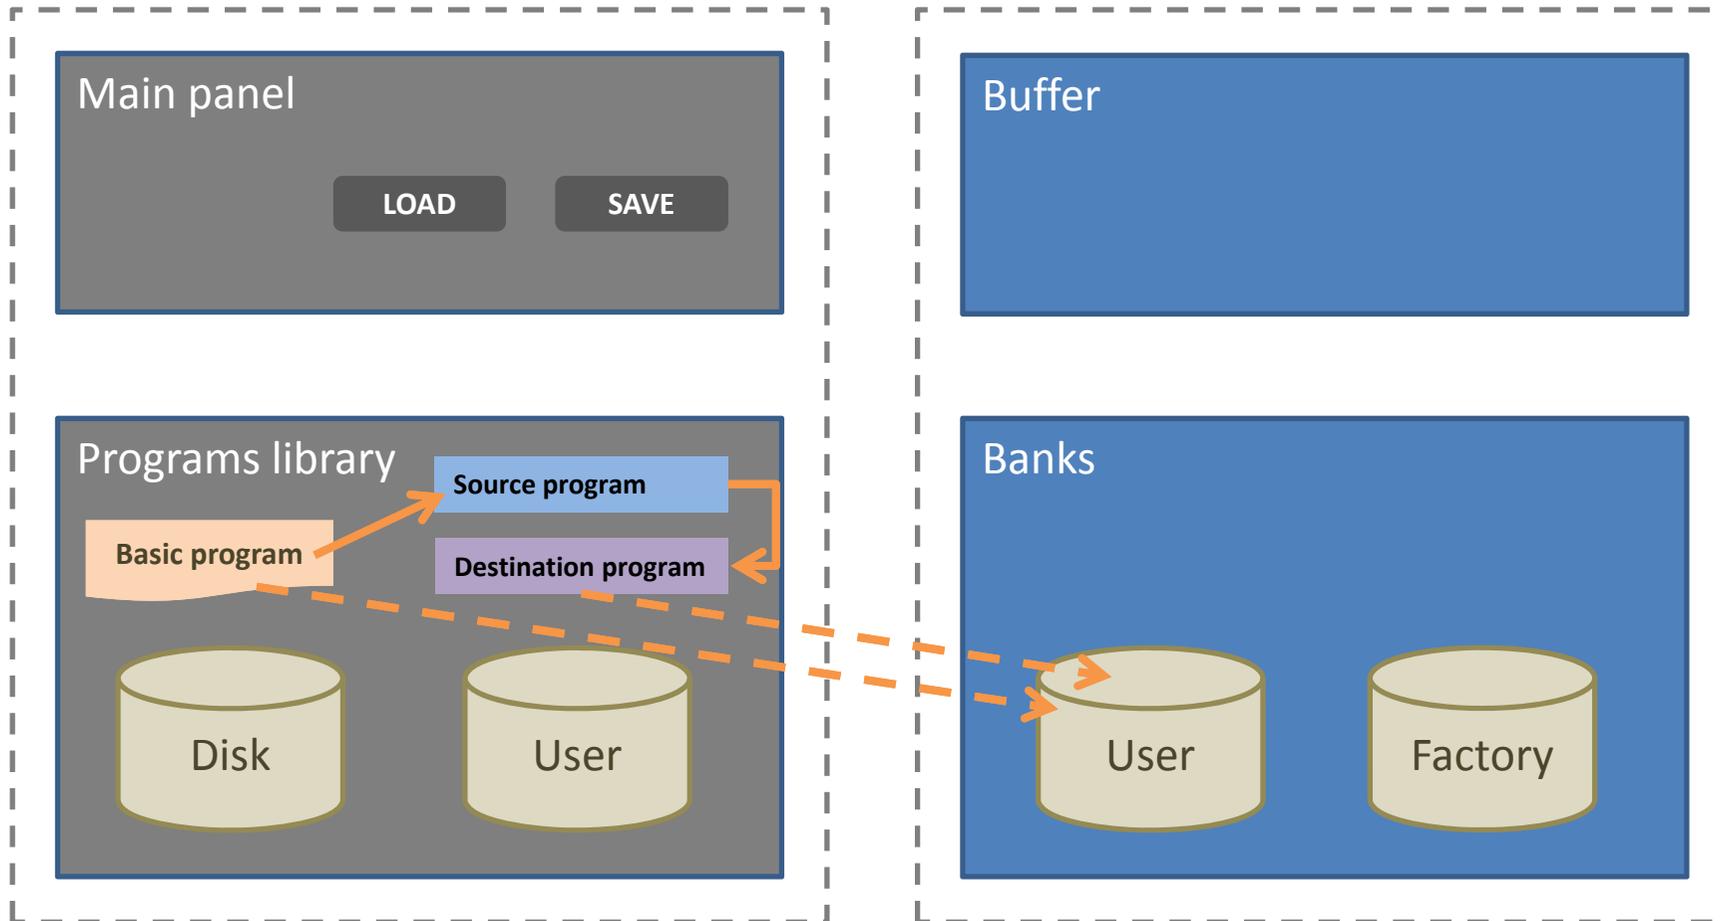


Program actions – Copy


Possibilities:

- Copy a program from Source to Destination
- If the Destination program is in Ux, it is changed on the Pro 2
- The Source program is selected with left-click
- The Destination program is selected with right-click

Ctrlr Panel

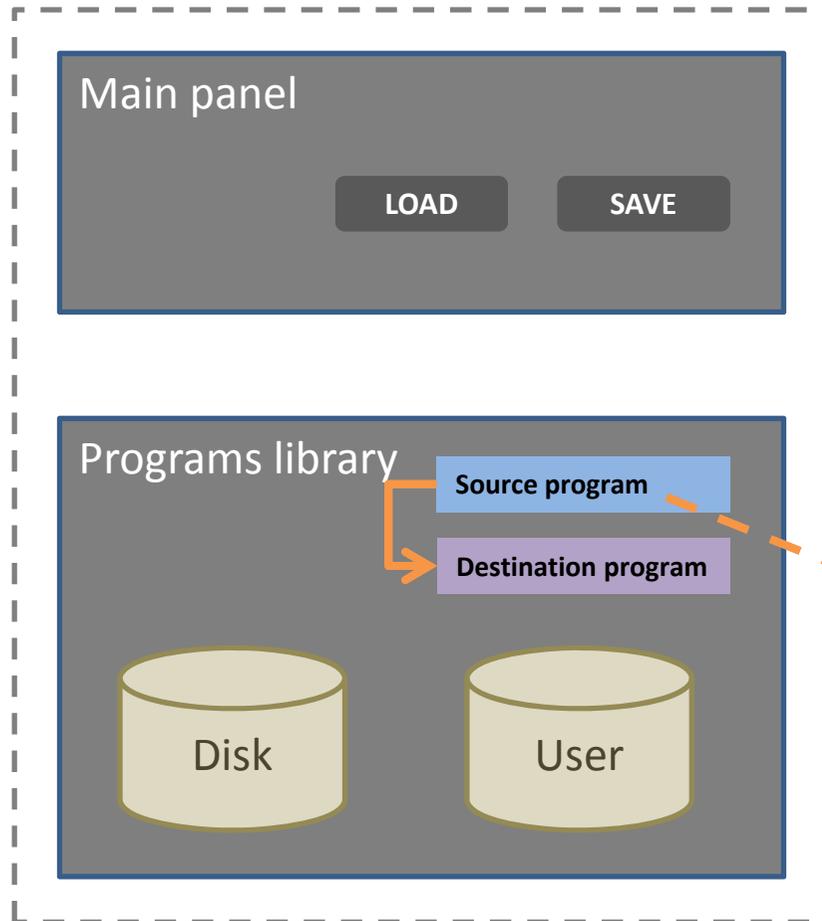

Pro 2

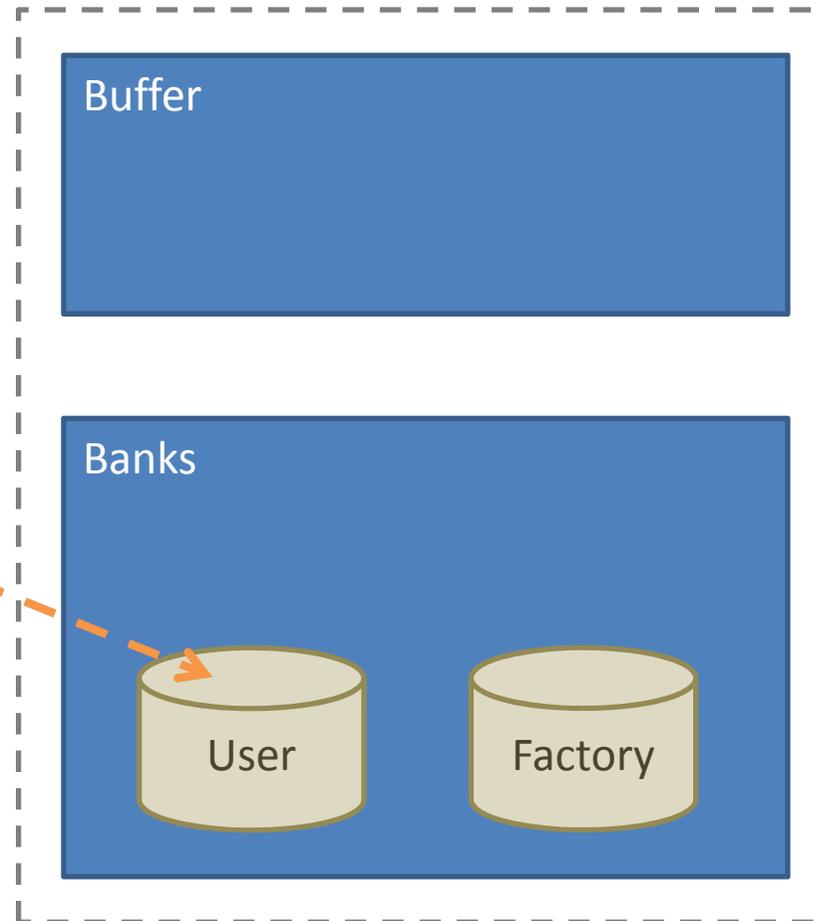


Program actions – Swap


Possibilities:

- Swap Source and Destination programs
- If the Source program is in Ux, it is changed on the Pro 2
- If the Destination program is in Ux, it is changed on the Pro 2
- The Source program is selected with left-click
- The Destination program is selected with right-click

Ctrlr Panel

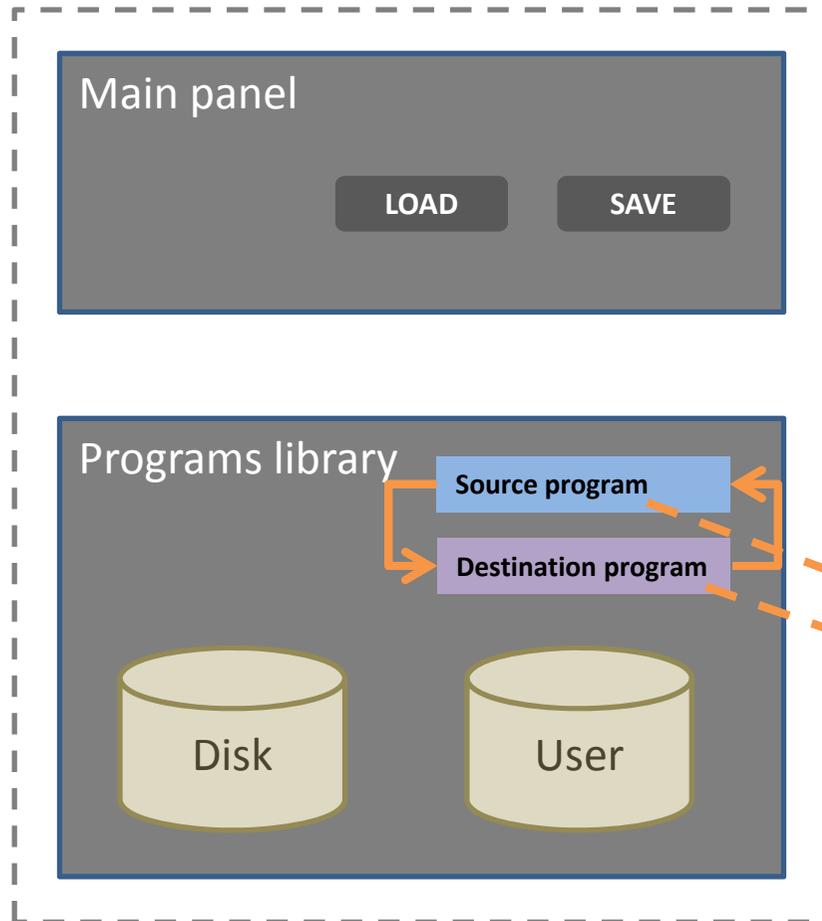


Pro 2

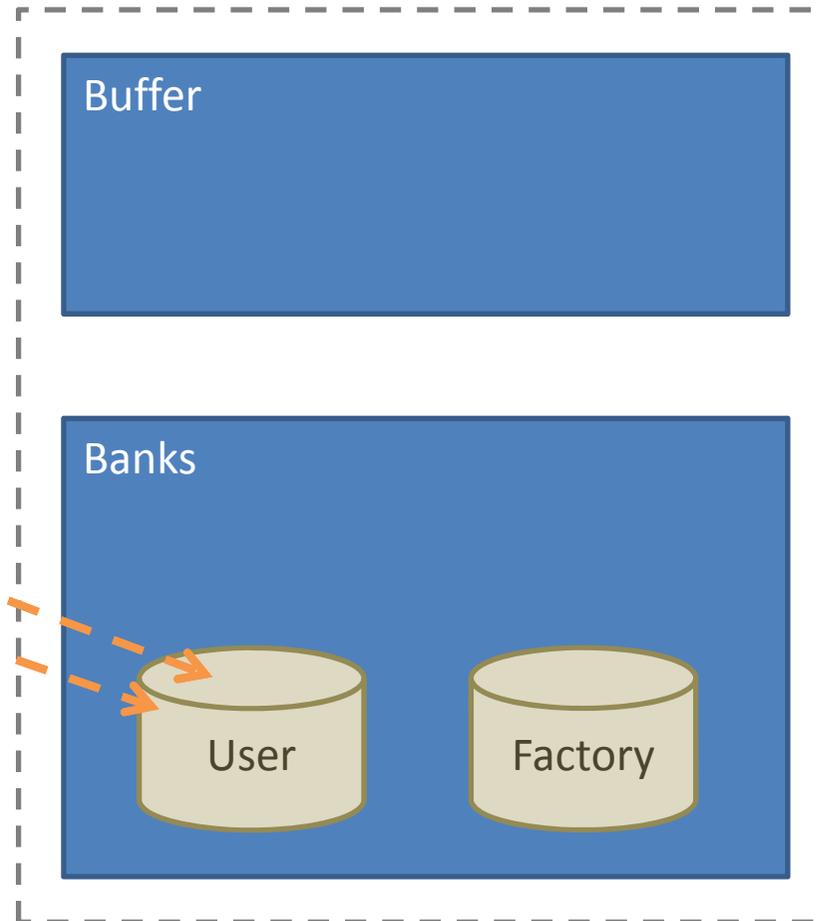

Bank actions - Load

Possibilities:

- Load a full bank from a .syx file in Dx, Ux
- Load an empty bank (99 basic programs) in Dx, Ux
- If Ux then the bank is also replaced in Pro 2

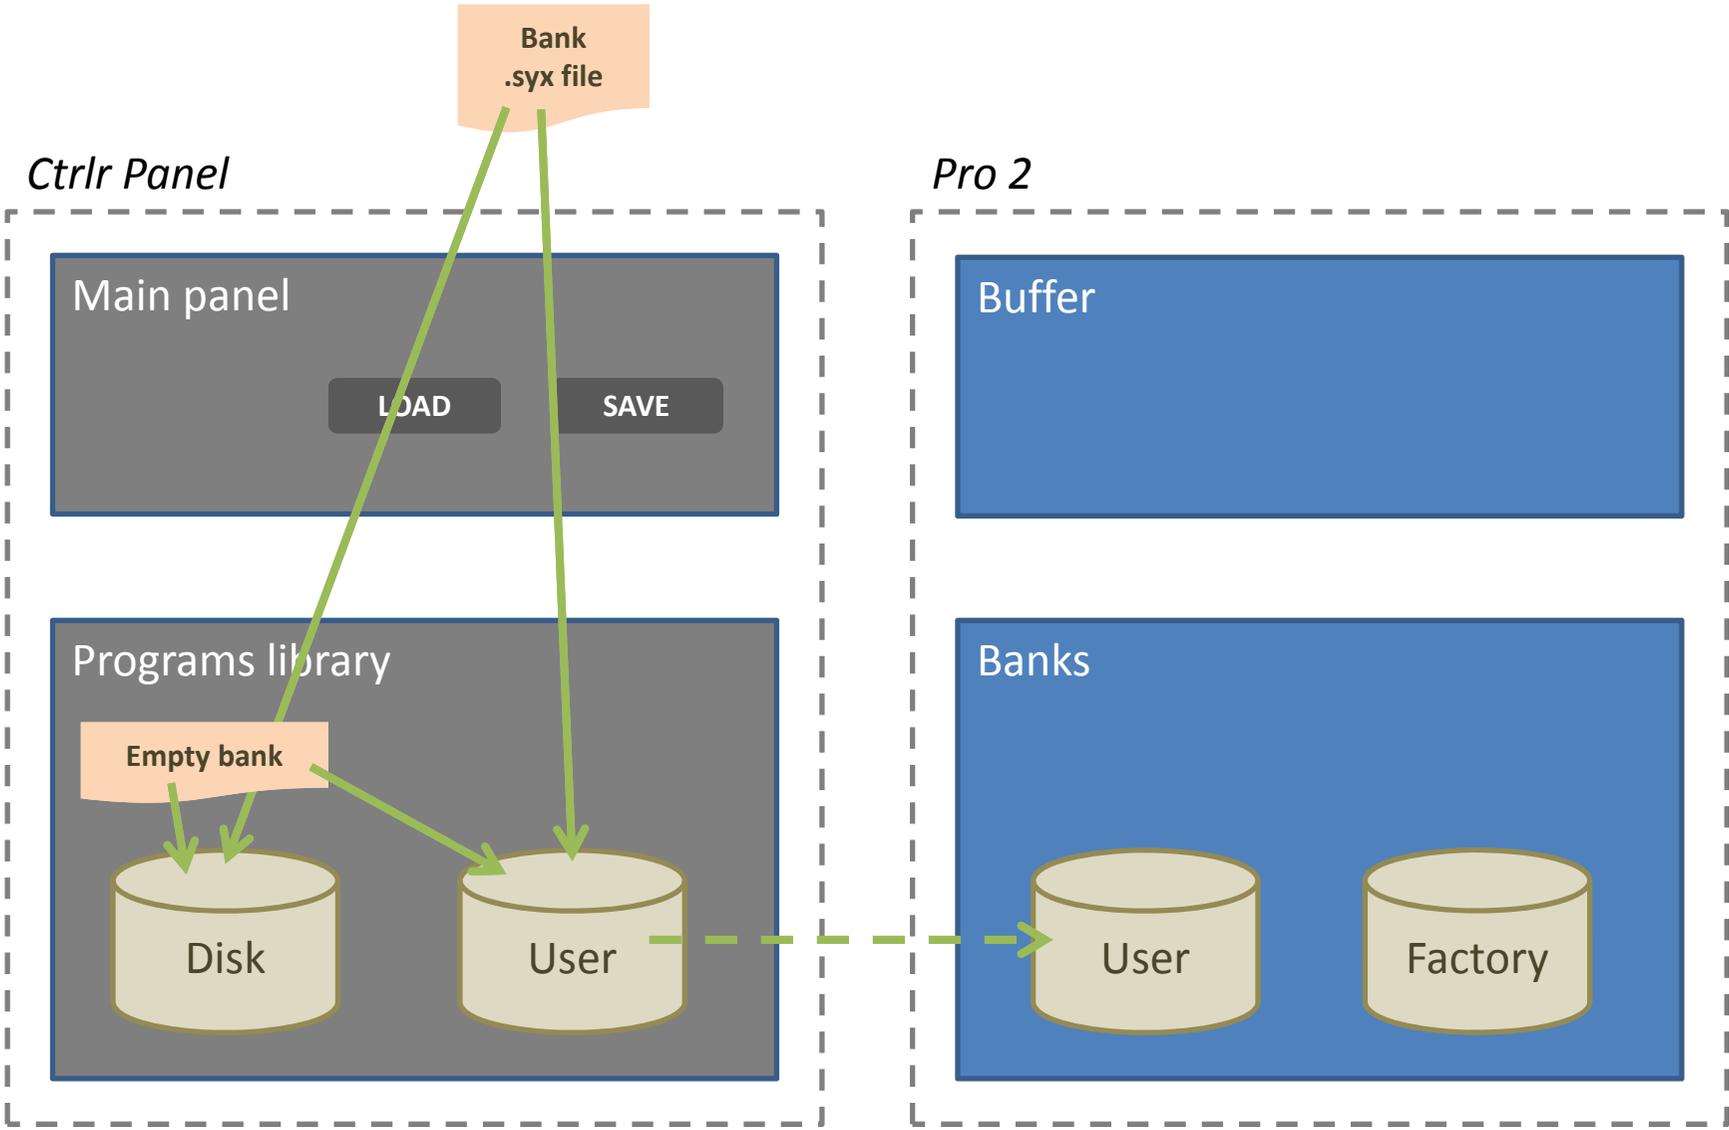

Bank actions - Save

Possibilities:

- Save a full bank to a .syx file
- Receive a Ux bank from Pro 2
- Optional: save bank to disk after Receive

